

# NEXUS

servomix

x20



# STOP WASTING

money

[nexus-elastomer.com](http://nexus-elastomer.com)

# NEXUS

servomix

x20

Say hello to our Nexus SERVOMIX X20 and good-bye to excessive material waste. You can rely on a stable and precise process – **perfect for smaller-scale applications.**



## Engineered for greatness. And great savings.

Offered Basic Systems	20 litre   5 gallons
Cleaning Time	50 min
Tandem	yes
NanoShoremix	yes
Dimensions (mm)	(l) 800 (d) 680 (h) 2002
Maximum Feed Rate	1000 cm <sup>3</sup> / min
Maximum Pressure	170 bar / 2466 PSI
Power Supply	3x340-480VAC + PE / GND / 16A
Air Supply	6 bar – 500 NL / min (1/2 ")
Drum Change (angle)	Pail change within 5 minutes
Pallet System	-
Rollers	yes
Additive Lines Standard (possible)	2 (5)
Upside Down Standard (possible)	1 (4)
Agitator System Standard (possible)	1 (4)
Pressure Container	4
Calibration A+B / Nano	yes / Nano optional
Drum Lifter	-


## How Nexus SPLITNEX beats the conventional shovel pump system.

Air bubbles get constantly separated for continuous material flow and a precise mixing ratio.

Less than 200g remaining quantity in the pail

Only 20 g flushing quantity at drum change

Total material savings of approx. 5-10 %

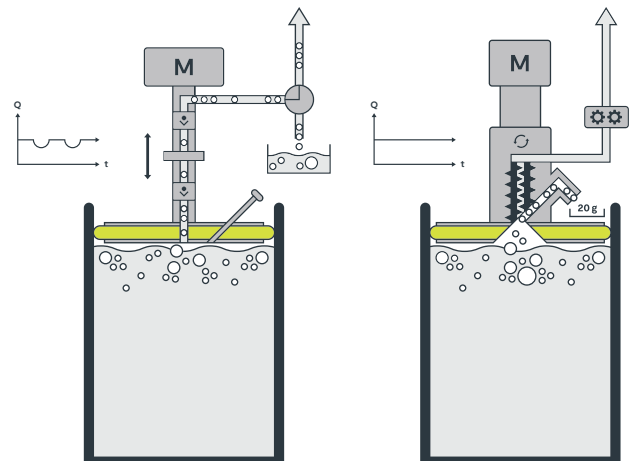

Conventional shovel pump system

Nexus Splitnex