

NEXUS servomix z200



STOP WASTING money


nexus-elastomer.com

NEXUS

servomix

z200

Say hello to our Nexus SERVOMIX Z200 and good-bye to excessive material waste. You can rely on a stable and precise process – and our most powerful dosing system ever.

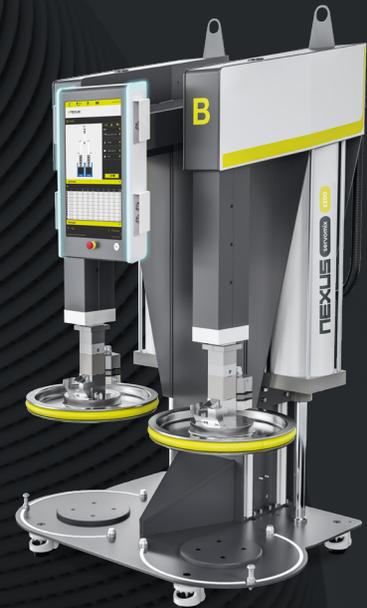

Engineered for greatness. And great savings.

Offered Basic Systems	200 / 20 litres 55 / 5 gallons
Cleaning Time	50 min
Tandem	yes
NanoShoremix	yes
Dimensions (mm)	(l) 1390 (d) 1120 (h shortest) 1966 / (h highest) 2865
Maximum Feed Rate	1000 cm ³ / min
Maximum Pressure	170 bar / 2466 PSI
Power Supply	3×340–480VAC + PE / GND / 16A
Air Supply	6 bar – 1000 NL / min (1/2")
Drum Change (angle)	Double-sided, quick and safe drum change from a 104° angle; Drum change within 5 minutes
Pallet System	-
Rollers	yes
Additive Lines Standard (possible)	2 (5)
Upside Down Standard (possible)	1 (4)
Agitator System Standard (possible)	1 (4)
Pressure Container	4
Calibration A+B / Nano	yes / Nano optional
Drum Lifter	yes

servomix

z200

10 cm distance

